


# LED strip K-BT-0450-24

Ref. K-BT-0450-24

NEW

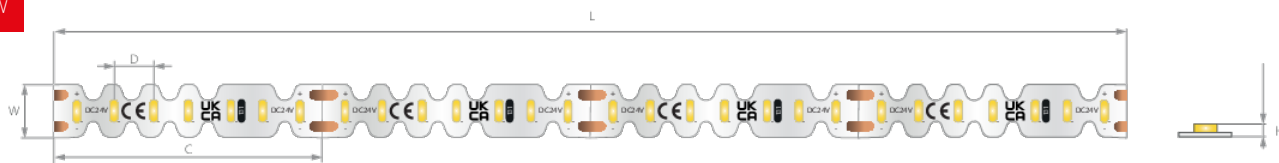

Dimensions: Width [W]: 7 mm | Max run length [L]: 3 m | Cut every [C]: 35.71 mm



- UL Listed
- CRI 90+
- Możliwość gięcia w płaszczyźnie świecenia

## TECHNICAL SPECIFICATIONS

IP protection rating	20
CRI	90
LxBy	L80B50
Lifetime	60000 h
Working temperature	-20°C - 60°C
Input voltage	24 V DC
Power consumption	4.5 W/m
Beam angle	120°
MacAdam's ellipse	3 SDCM
Length [L]	5000 mm
Number of LEDs per 1 m	196
Number of LEDs per cut section	6 pcs
Energy consumption	4.5 kWh/1000h
Warranty [months]	84

Color temperature	Lumen output	Efficiency	Ref
2700 K	335 lm/m	74 lm/W	K-BT27-0450-24
3000 K	340 lm/m	75 lm/W	K-BT30-0450-24
3500 K	370 lm/m	82 lm/W	K-BT35-0450-24
4000 K	375 lm/m	83 lm/W	K-BT40-0450-24
5000 K	375 lm/m	83 lm/W	K-BT50-0450-24