


LED strip K-HD-1440-24

Ref. K-HD-1440-24



Dimensions: Width [W]: 10 mm | Max run length [L]: 5 m | Cut every [C]: 33.3 mm | LED spacing [D]: 4.16 mm

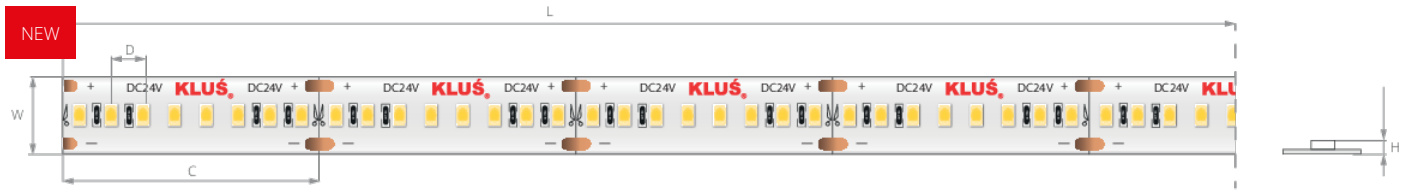

- High lighting efficacy
- Energy class: D
- High density diode placement

TECHNICAL SPECIFICATIONS

IP protection rating	20
CRI	90
Working temperature	-20°C - 60°C
Input voltage	24 V DC
Power consumption	14.4 W/m
Beam angle	120°
MacAdam's ellipse	3 SDCM
Length [L]	5000 mm
Number of LEDs per 1 m	240
Number of LEDs per cut section	7 pcs
Energy consumption	14.4 kWh/1000h
Warranty [months]	84

Color temperature	Lumen output	Efficiency	Ref
2700 K	1870 lm/m	129 lm/W	K-HD27-1440-24
3000 K	1925 lm/m	133 lm/W	K-HD30-1440-24
3500 K	1955 lm/m	135 lm/W	K-HD35-1440-24
4000 K	2040 lm/m	141 lm/W	K-HD40-1440-24
5000 K	2040 lm/m	141 lm/W	K-HD50-1440-24