


LED strip KWP-14KHDRGB-1920-24

Ref. KWP-14KHDRGB-1920-24



Dimensions: Width [W]: 10 mm | Max run length [L]: 5 m | Cut every [C]: 50 mm | LED spacing [D]: 8.3 mm | Height [H]: 4 mm

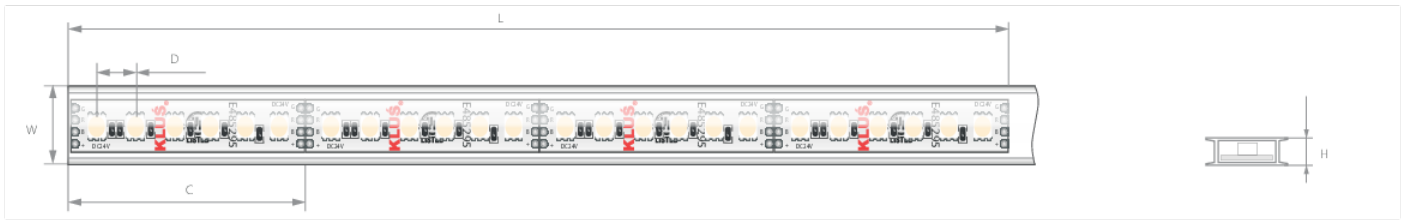

- UL Listed
- High light transmission of the silicone sleeve (over 93%)

ADDITIONAL INFORMATION

- the luminous flux applies to unsealed LED strip

TECHNICAL SPECIFICATIONS

IP protection rating	65
Sealing type	silicone sleeve
LED color	RGB
Lumen output	174 lm/m 365 lm/m 76 lm/m
Lifetime	40000 h
Working temperature	-20°C - 60°C
Input voltage	24 V DC
Power consumption	19.2 W/m
Beam angle	120°

Number of LEDs per 1 m	120
Number of LEDs per cut section	6 pcs
Energy consumption	20 kWh/1000h
Warranty [months]	48

Color temperature	Efficiency
RED	9 lm/W
GREEN	19 lm/W
BLUE	3 lm/W