


LED strip KWP-14KVHE-0480-24

Ref. KWP-14KVHE-0480-24



Dimensions: Width [W]: 16.7 mm | Max run length [L]: 5.5 m | Cut every [C]: 50 mm | LED spacing [D]: 5.56 mm

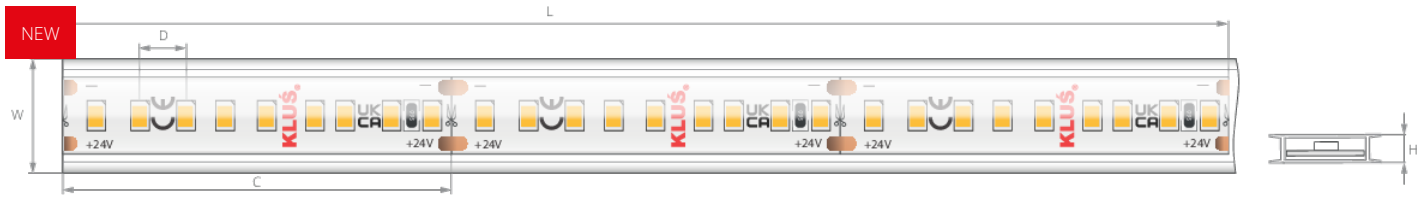

- High lighting efficacy
- Energy class: C
- For the construction of sealed lighting fixtures

TECHNICAL SPECIFICATIONS

IP protection rating	65
Sealing type	silicone sleeve
CRI	90
Working temperature	-20°C - 60°C
Input voltage	24 V DC
Power consumption	4.8 W/m
Beam angle	120°
MacAdam's ellipse	3 SDCM
Number of LEDs per 1 m	180
Number of LEDs per cut section	9 pcs
Energy consumption	4.8 kWh/1000h
Warranty [months]	48

Color temperature	Lumen output	Efficiency	Ref
2700 K	670 lm/m	139 lm/W	KWP-14KVHE27-0480-24
3000 K	711 lm/m	148 lm/W	KWP-14KVHE30-0480-24
3500 K	735 lm/m	153 lm/W	KWP-14KVHE35-0480-24
4000 K	744 lm/m	155 lm/W	KWP-14KVHE40-0480-24
5000 K	758 lm/m	157 lm/W	KWP-14KVHE50-0480-24