


# LED strip KWP-27T50-1440-24

Ref. KWP-27T50-1440-24



Dimensions: Width [W]: 12 mm | Max run length [L]: 4 m | Cut every [C]: 55.56 mm | LED spacing [D]: 4.2 mm | Height [H]: 4 mm

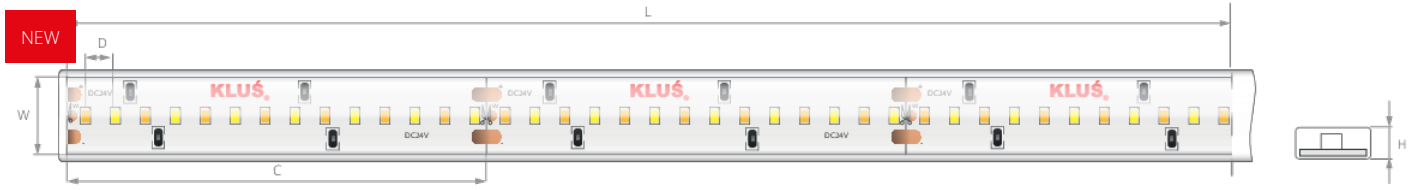

- UL Listed
- CRI 90+
- 3-Step MacAdam's ellipse, single binning

## TECHNICAL SPECIFICATIONS

IP protection rating	65
Sealing type	silicone sleeve
CRI	90
Lumen output	1162 lm/m
LxBy	L70B50
Lifetime	60000 h
Working temperature	-20°C - 60°C
Input voltage	24 V DC
Power consumption	14.4 W/m

Beam angle	120°
MacAdam's ellipse	3 SDCM
Number of LEDs per 1 m	252
Number of LEDs per cut section	14 pcs
Energy consumption	15 kWh/1000h
Tunable white	yes
Warranty [months]	48
Energy class	F

Color temperature	Efficiency
2700...5000 K	80 lm/W