

Fastener W-KGM-Z

Ref. C20012



- Longitudinal suspension on a rod or wire
- Single pole conductivity possible
- Mounting to drywall
- Installation in solid masonry surfaces


APPLICATION

- for suspending LED lighting fixtures

MOUNTING

- to the surface, using the included accessory kit
- to a rod or cable, using a set bolt

TECHNICAL DRAWING

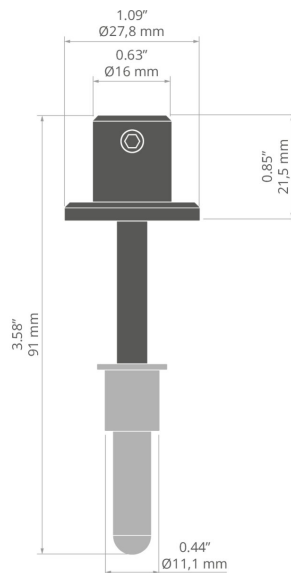

TECHNICAL SPECIFICATIONS

IP protection rating	20
Height	21.5 mm
Diameter	27.8 mm
Corrosion resistance	yes
Conducting electricity	yes
UV radiation resistance	yes
Working temperature	54°C
Lifting capacity	20 kg
Maximum current	10 A
Loss of voltage	0.1 V

Material	Color	Ref
aluminum	■ black lacquered	C20012L07
aluminum	□ white lacquered	C20012L10
stainless steel	■ silver	C20012N00

Fastener W-KGM-Z

Ref. C20012

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > WIRES AND RODS



STAINLESS STEEL WIRE
FI-1
C24510N00



STAINLESS STEEL WIRE
FI-1 1m
C24522N00



WIRE
CU FI 0,95 mm
Z70240



ROD
PUSZ-ALU
C28272A, C28272A07